

HW100

- ◆ 10 - 12V AC
- ◆ 0.8 AC (max) μ
- ◆ μ
10 - 200Kgr
- ◆ μ
+/- 0.1%
- ◆ 4 x 7-segment displays
(, 56.8mm / 2.3")
 μ μ
(ZERO , TARR)
- ◆ μ
(TRANSDUTEC TPF-2A)
 μ
- ◆ μ -20 50°C (-4 122°F)
- ◆ 259.0 x 100.0 mm (10.20" x 3.94")

!!!

GR

- ◆ μ μ μ μ . μ μ
- ◆ 230Vac. / μ μ
- ◆ μ
- ◆ μ μ .
- ◆ , .
- ◆ μ -20°C 50°C.



μ



!

μ μ

μ


μ

μ

μ

-
-
-

μ ZERO μ ZERO
 μ ZERO μ
 "0000" μ

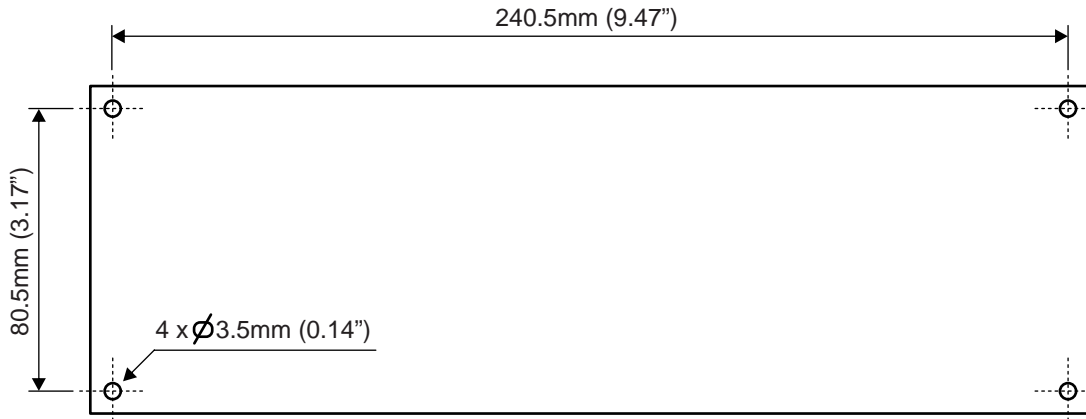

HW100

	8 - 12 V AC
μ	0.8 A AC(max)
μ	10 - 200 Kgr
μ	+ / - 0.1%
	TRANSDUTEC TPF-2A
μ	4x7-segment displays (, 56.8mm/2.3") μ μ (ZERO,TARR)
μ	(NO)
μ	40 msec (max)
μ	0,4 sec (max)
μ	-20 50 °C (-4 122 °F)
	259.0 x 100.0 mm (10.20" x 3.94")