

HW110

- ◆ 85 - 264V AC, 120 - 373V DC
- ◆ 5V DC
- ◆ μ
6 x 1.15A DC (35W max)
- ◆ μ
-30 70°C (-22 158°F)
- ◆ μ
99.0 x 82.0 x 30mm (39" x 32.3" x 11.8")
- ◆ μ
: L (), N (), PE (\perp)
: +V (5V DC), -V (0V)

μ



:

- ◆ μ μ μ μ . μ
- ◆ 230VAC.
- ◆ μμ (L, N PE).
- ◆ μ μ .
- ◆ , .
- ◆ μ -30°C 70°C (-22 158°F).



μ



!

230VAC.



HW110

230V AC

6

5Vdc (35W max).

μ

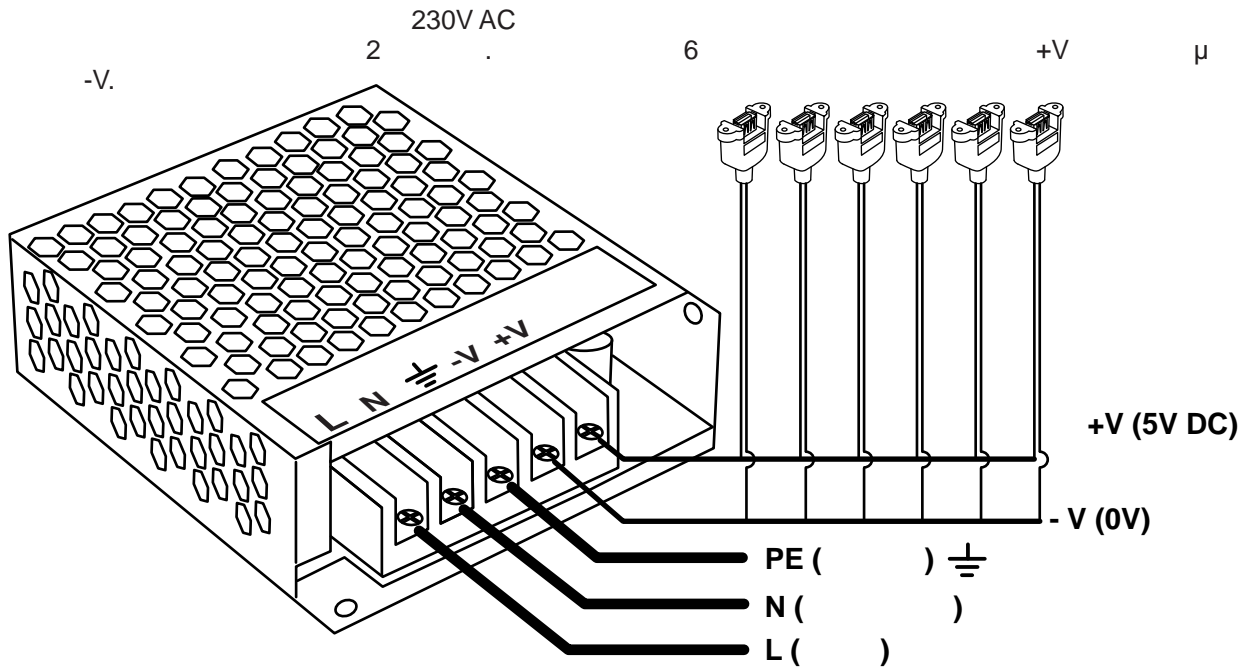

HW110
230V AC

HW110

85 - 264V AC, 120 - 373V DC

5V DC

6 x 1.15A DC (35W max)

82%

L (), N (), PE ()

+ (5V DC), - (0V)

6 x USB Type A

-30 70 °C (-22 158 °F)

99.0 x 82.0 x 30mm (39" x 32.3" x 11.8")